

1/10

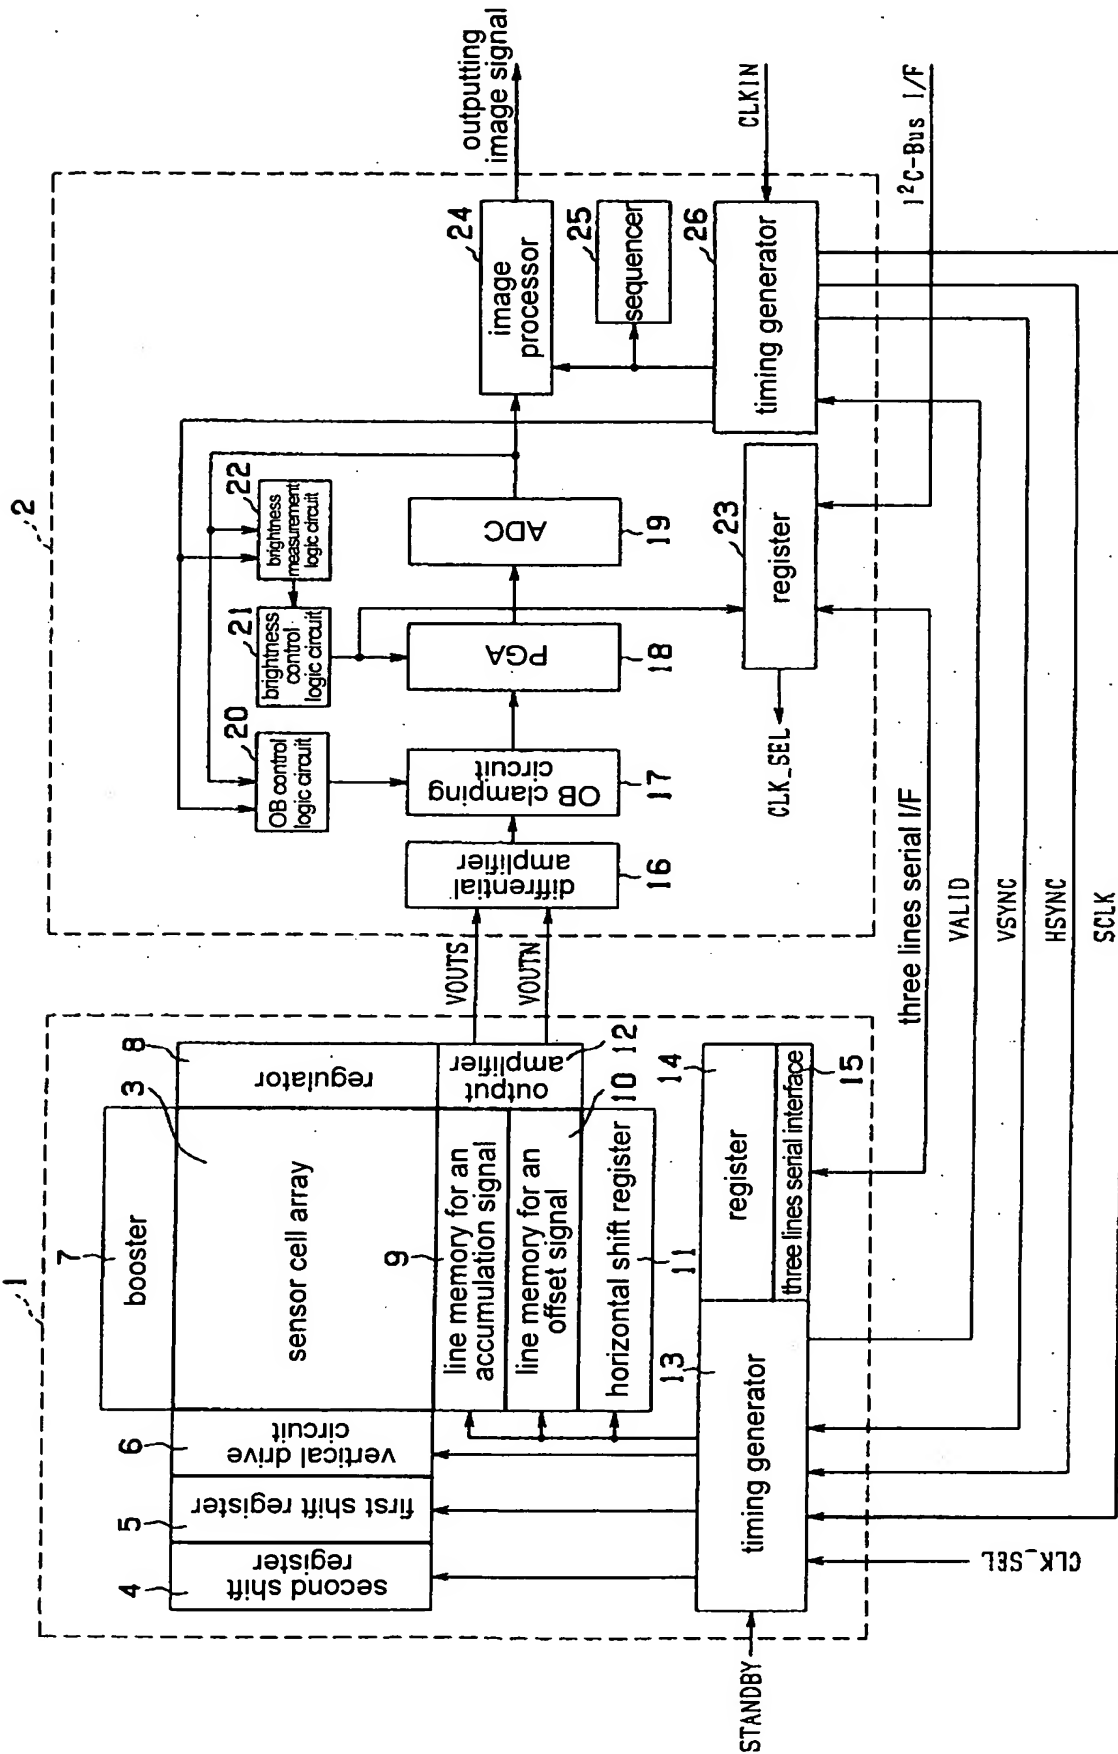


FIG. 1

2/10

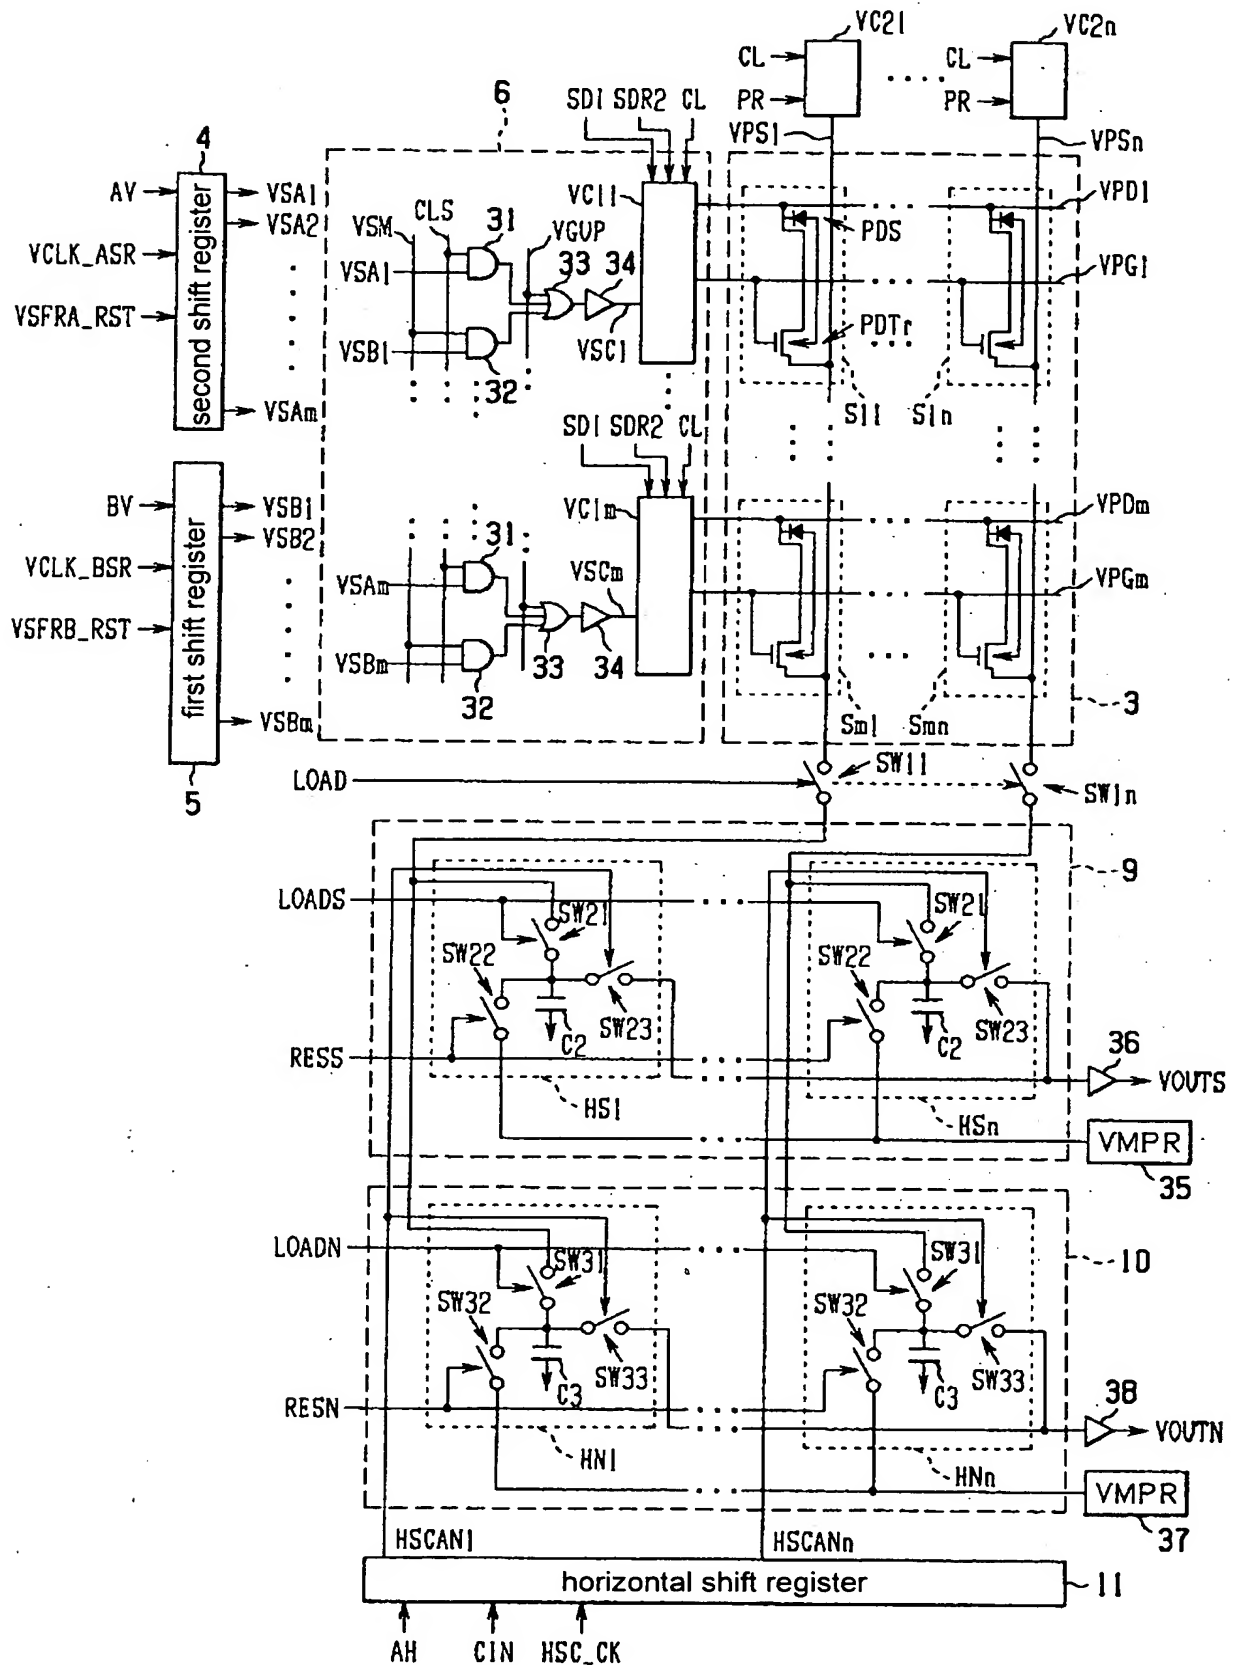


FIG. 2

3/10

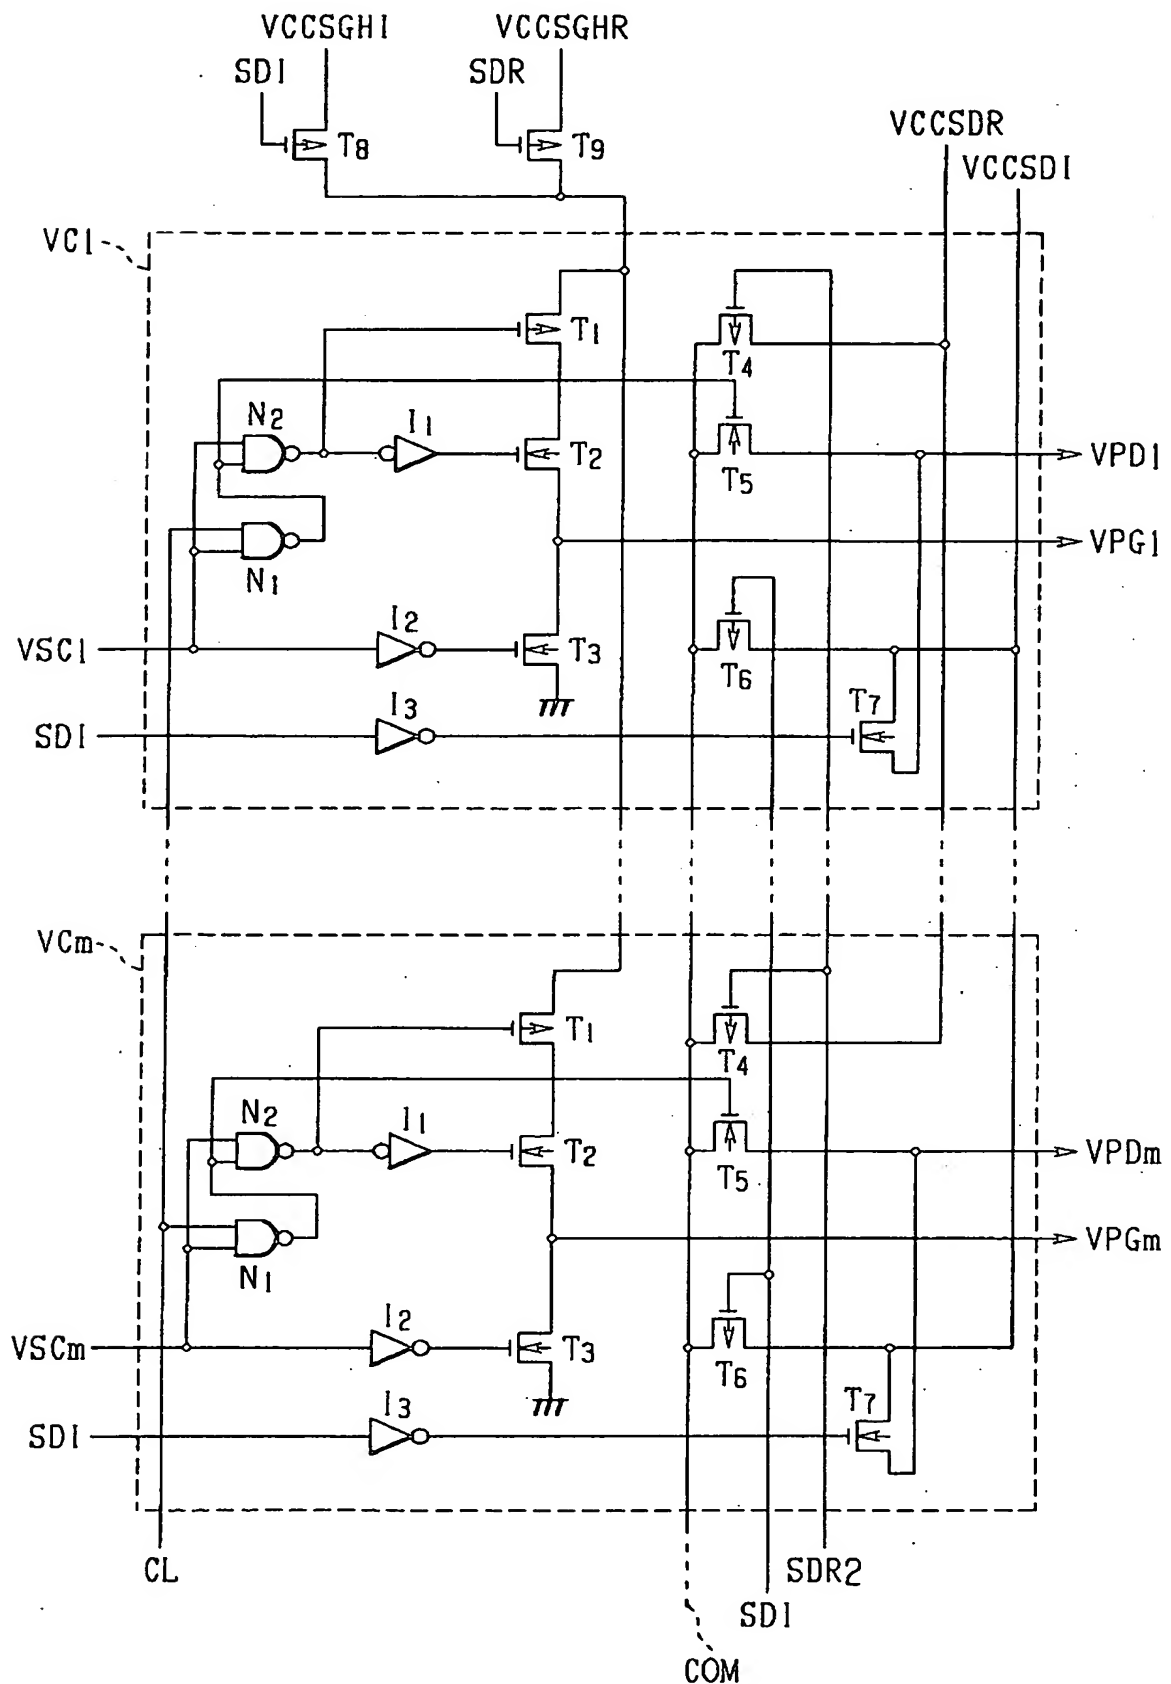


FIG. 3

4/10

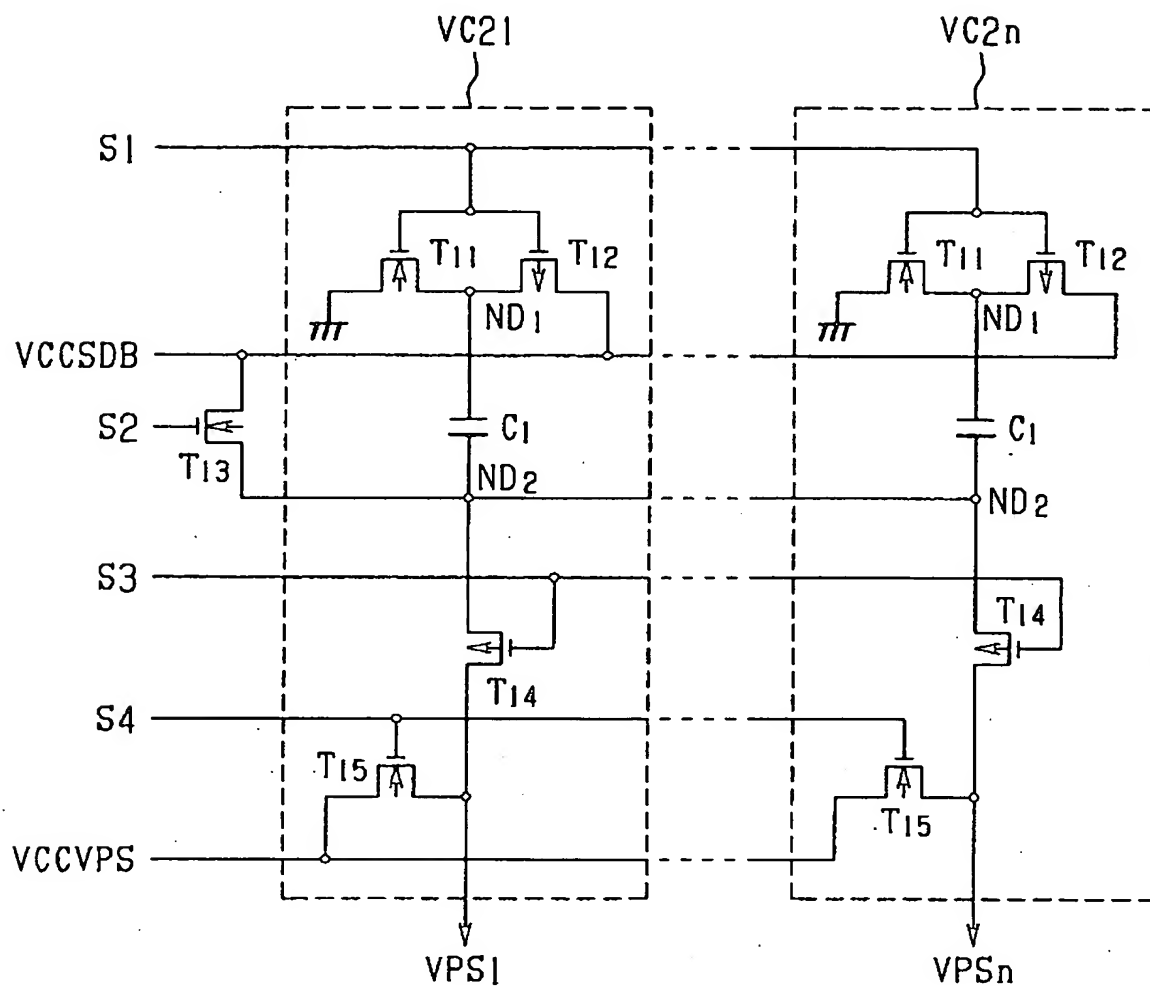


FIG. 4A

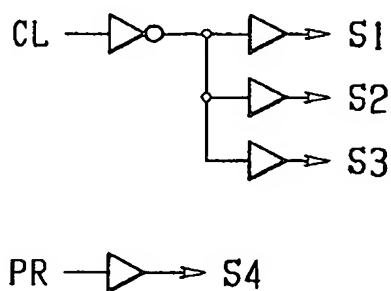


FIG. 4B

5/10

States of sensor bias

	state	accumulation	RESS	LOADS	PR	CL	RESN	LOADN
GATE	selected	VCCSGHI	Lo	VCCSGHR	VCCSGHR	VCCSGHR+ VCCSDBX 2	LoI	VCCSGHR
	non selected		Lo	Lo	Lo	Lo	Lo	Lo
SOURCE	selected	turning "on" (VCCSDI)	VMPR	VCCSGHR-VthS	VCCVPS	VCCSDBX 2	VMPR	VCCSGHR-VthN
DRAIN	selected	VCCSDI	HiZ	VCCSDR	turning "on" (VCCVPS)	turning "on" (VCCSDBX 2)	HiZ	VCCSDR
	non selected		HiZ	VCCSDR	VCCVPS	VCCSDR	HiZ	VCCSDR

FIG. 5

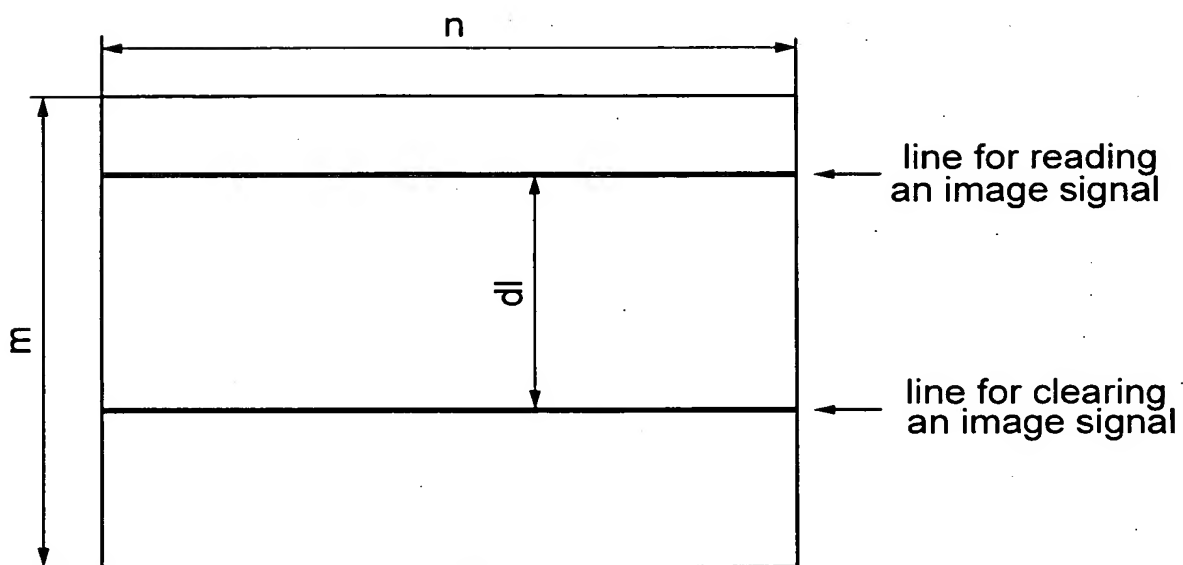


FIG. 6

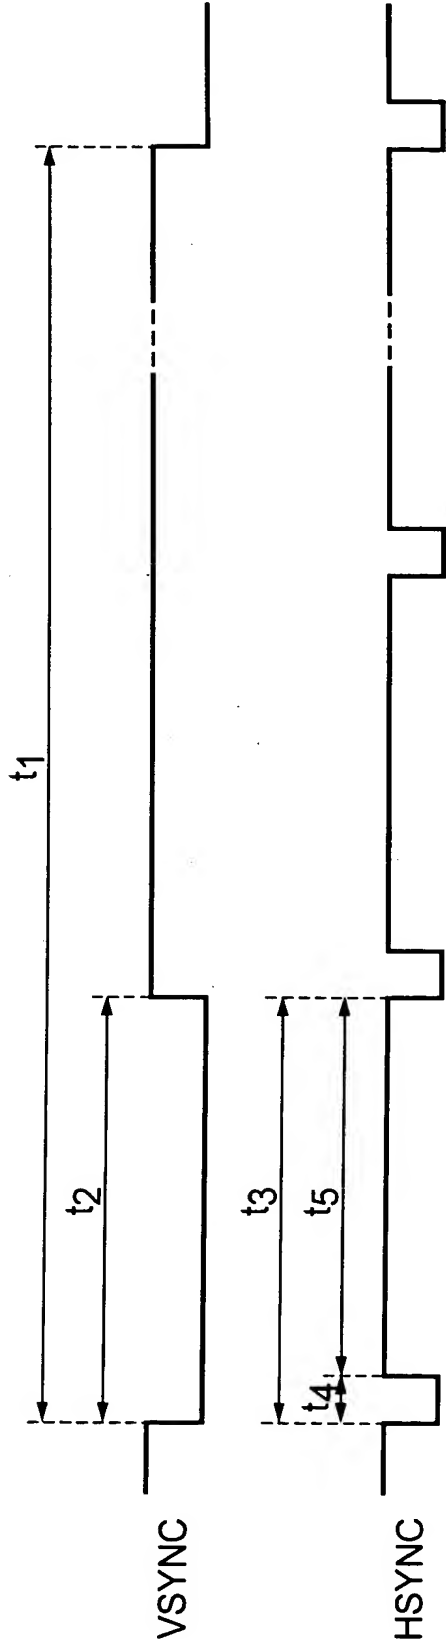


FIG. 7

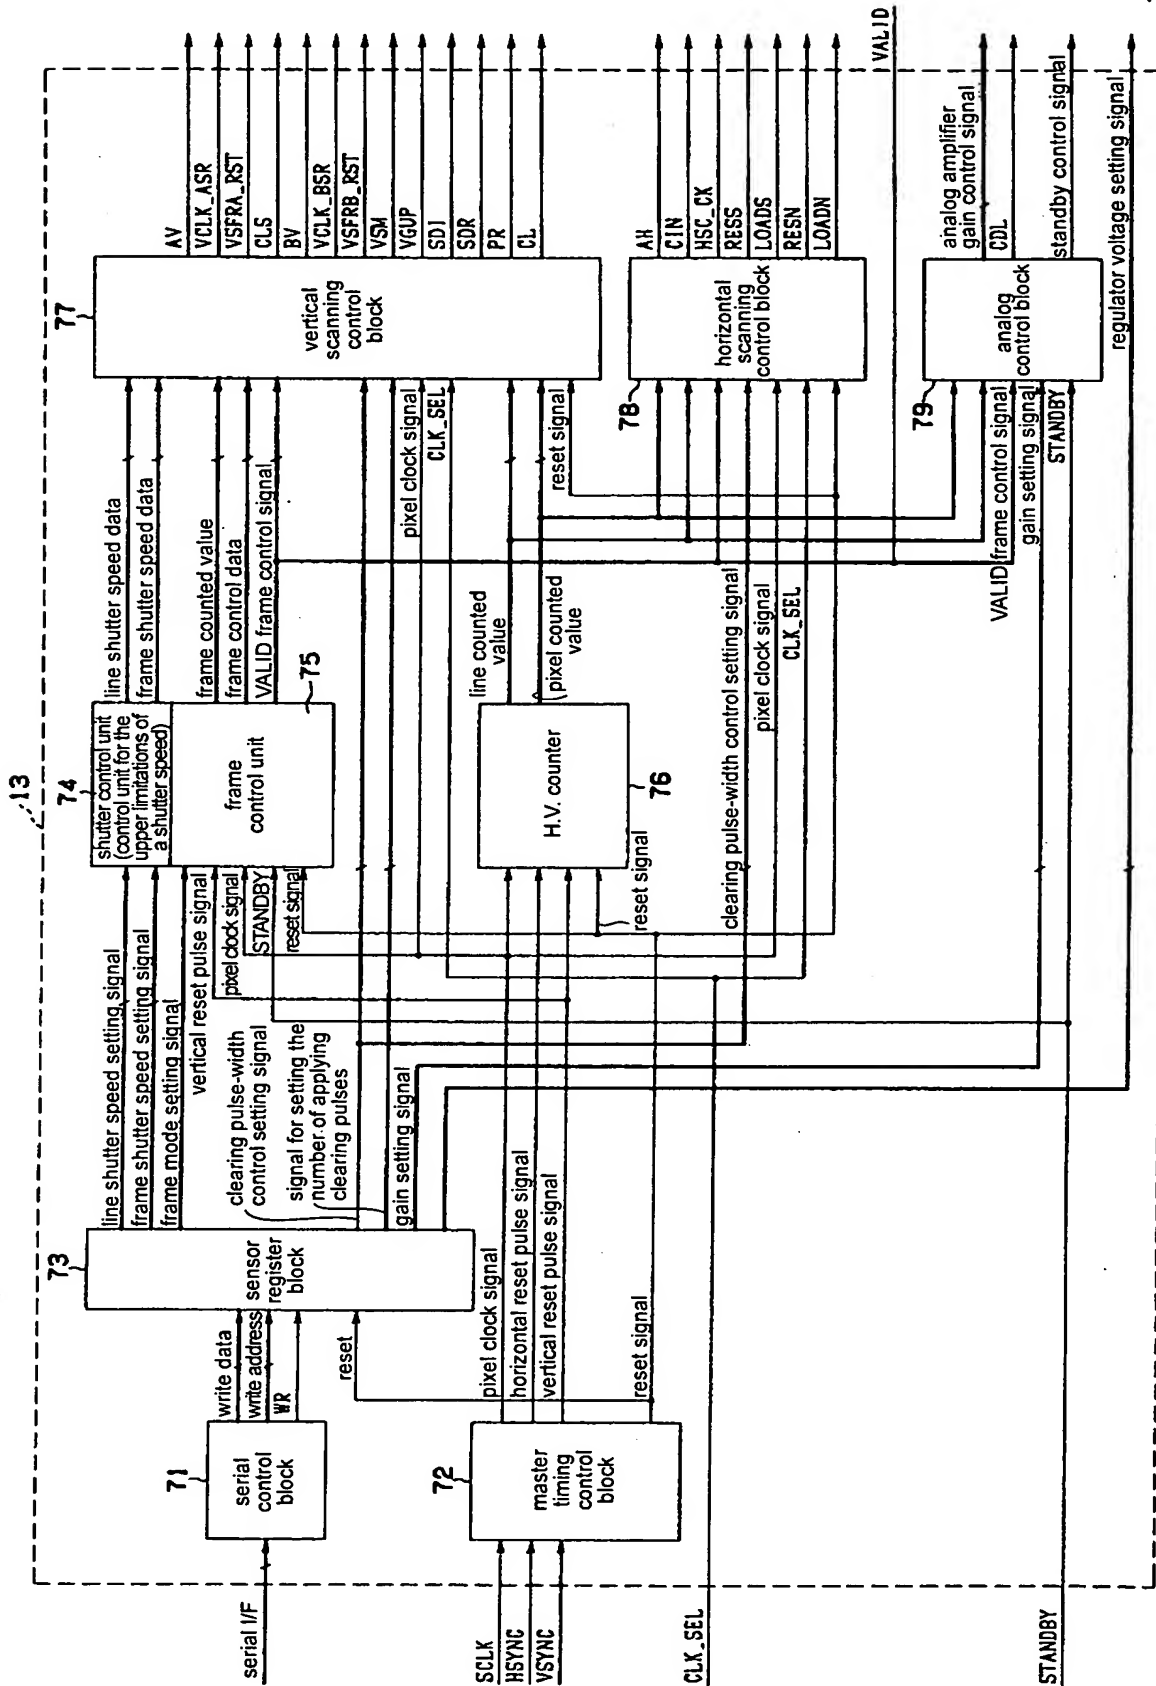


FIG. 8

Title: IMAGE-PROCESSING DEVICE, IMAGE-PROCESSING METHOD AND SOLID-STATE
IMAGE PICKUP DEVICE
Inventor: Hiroaki NASU
Atty. Ref.: 9319S-000596

10/10

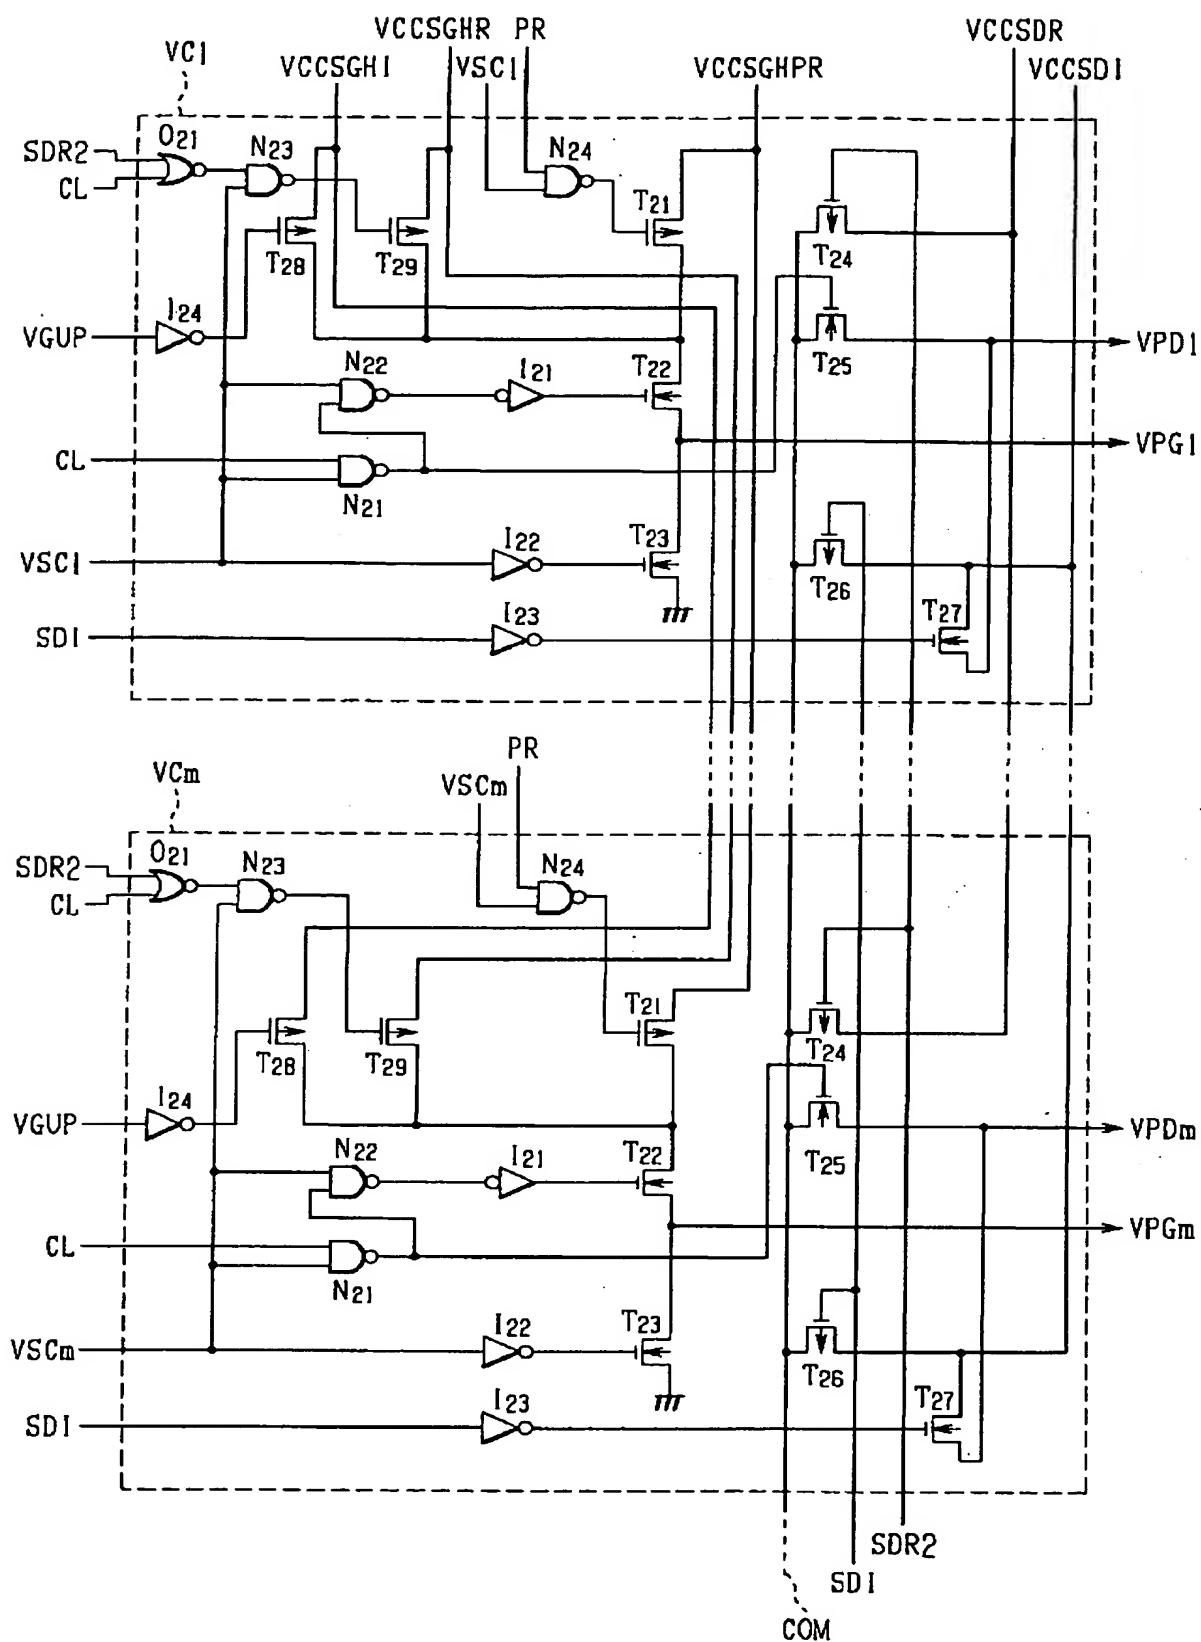


FIG. 10